

KOMATSU

D55S-3

DOZER SHOVEL

SHOP MANUAL

D55S-2008 up

GENERAL

SPECIFICATIONS

GENERAL INSTRUCTIONS

ENGINE

TORQUE CONVERTER

TORQFLOW TRANSMISSION

RANGE TRANSMISSION

BEVEL GEAR & SHAFT

STEERING SYSTEM

FINAL DRIVE

UNDER-CARRIAGE

FUEL TANK

ELECTRICAL EQUIPMENT

DOZER GROUP

HYDRAULIC SYSTEM

SIDE FRAME

MAINTENANCE STANDARDS

GENERAL

INDEX

FOREWORD00-01

FOREWORD

This MANUAL is published for the information and guidance of shop personnel charged with the task of servicing the KOMATSU D55S-3 Dozer Shovel, and provides instructions to be adhered to in disassembling and re-assembling machines of this model in the shop. The instructions are given mainly in the form of procedures, and, in each section of the MANUAL, are preceded by an outline description of each major component in respect to mechanical construction, function and other pertinent items.

TERMINOLOGY

Effort has been made in the preparation of this MANUAL to use the most common shop terms in order to avoid ambiguity and equivocation. Some key terms used, however, require precise agreement in advance between the writer and the reader as to their meanings, as the clarity of what are aimed at in shop work depends largely on these terms. Throughout this MANUAL, the major key terms are used with following meanings.

(1) Clockwise (C.W.) and Counterclockwise (C.C.W.)

A circular direction, C.W. or C.C.W., is in the mind of the viewer standing in front and ahead of the machine, except when a driven component is discussed.

Such a component as the oil pump, the component is considered singly and as viewed from its driving side.

(2) Terms of Servicing Criteria

BASIC SIZE: This term is universally defined as the theoretical or nominal standard size (diameter, length, thickness, etc.) from which variations are

made, and is used in this sense throughout.



ASSEMBLY STANDARD: This is a dimensional value or a range of dimensional values to be adhered to in assembling components. An assemblage is required to satisfy the assembly standard specified for it.

STANDARD CLEARANCE: This refers to a clearance range, within which a distance of separation occurring in a full assembly or sub-assembly of replacement parts must take its value.

Such an assembly or sub-assembly is permitted to be installed or mounted in place only when this requirement is satisfied.

CLEARANCE LIMIT (maximum allowable clearance): A running clearance between a shaft and its hole, for instance, will increase as the shaft or hole wears progressively. A clearance limit is provided for each critical or important clearance and, if such a clearance is found to have increased upon disassembling beyond the clearance limit specified for it, the parts associated with that clearance must be corrected to take a value within the limit.

SERVICE LIMIT: An extra stock is provided in some parts subject to wear, so that these parts may be repaired upon disassembling. There are many such parts that can be re-used repeatedly until their extra stock is used up by grinding, cutting, etc. A service limit is the minimum or the maximum dimension (thickness, diameter, etc.) specified for such a part. Any part found to have exceeded its service limit is not repairable: its serviceability has ended and a replacement part must be used in re-assembling.

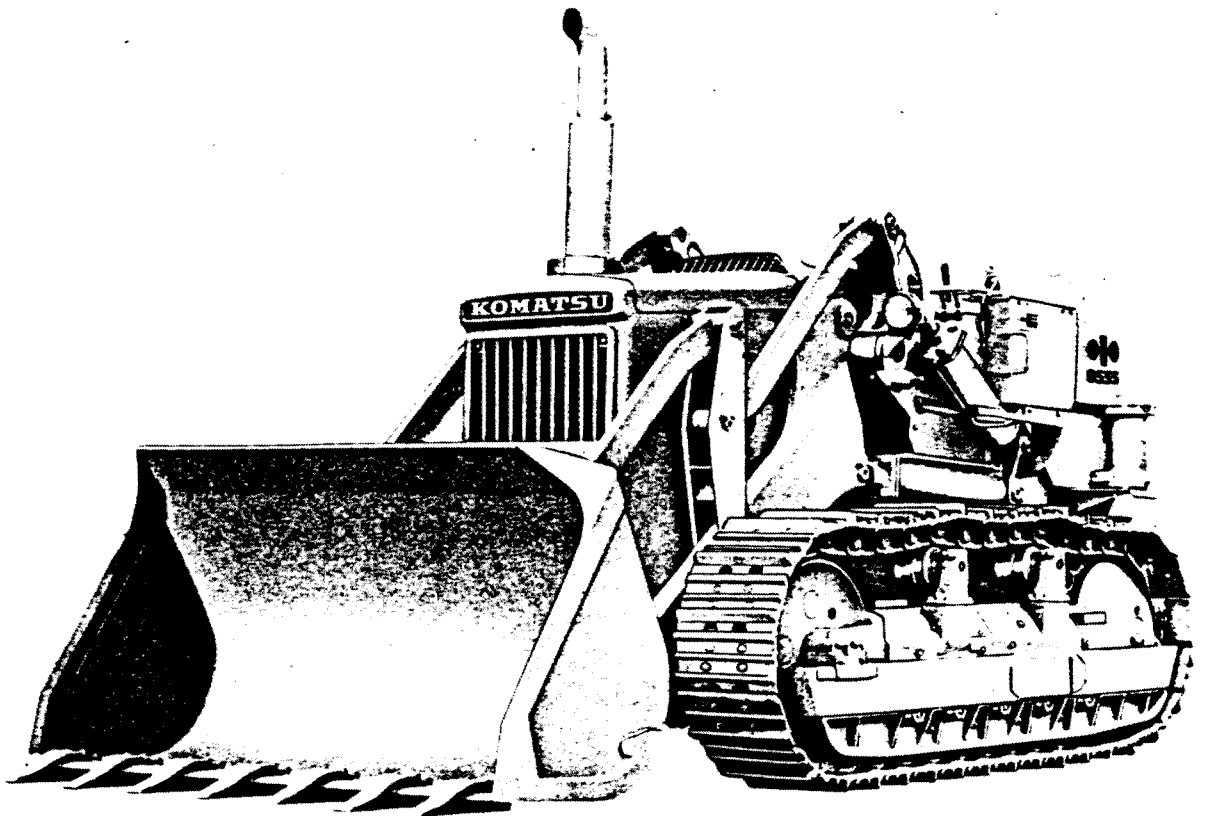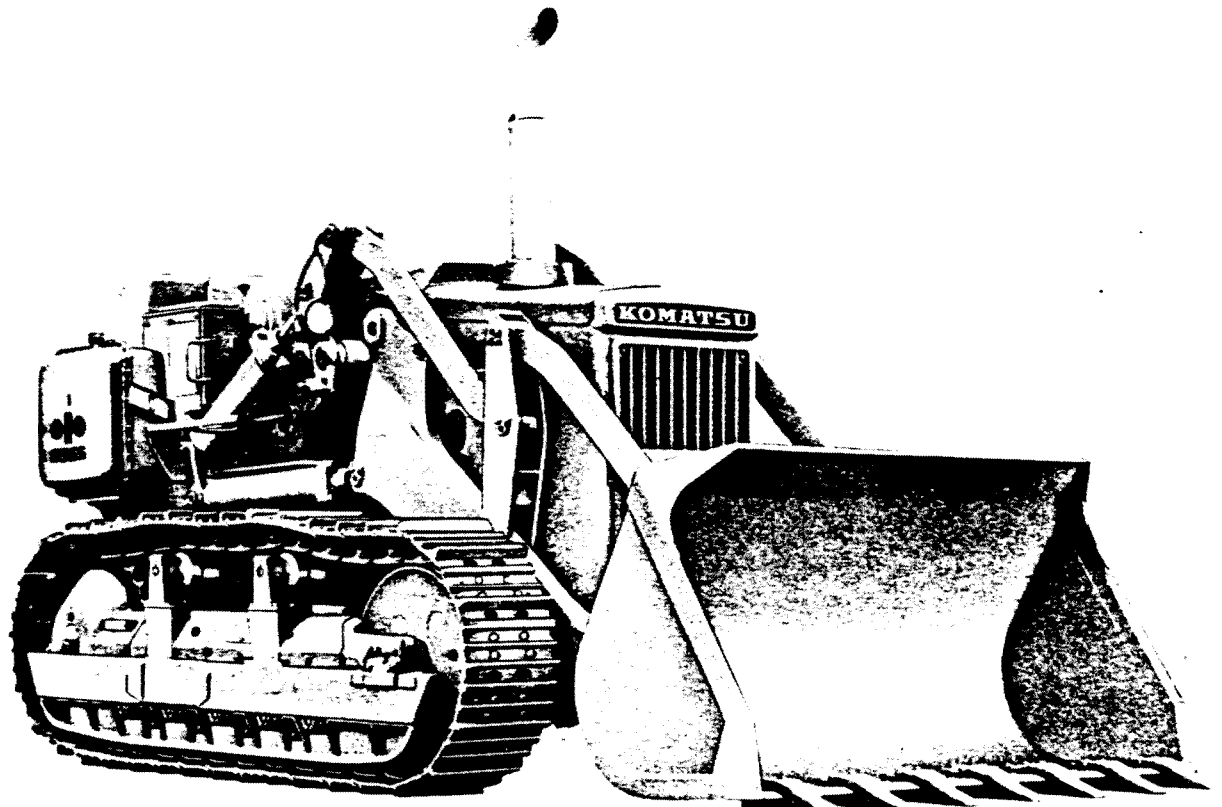

D55S-3 DOZER SHOVEL

SPECIFICATIONS

INDEX


SPECIFICATIONS	01-01
POWER TRAIN	01-06

SPECIFICATIONS

SPECIFICATIONS

MACHINE MODEL		D55S-3 DOZER SHOVEL (TORQFLOW)		
Operating weight		13300 kg (29,320 lb)		
DIMENSIONS	Overall length	5165 mm (203.3 in)		
	Overall width, w/o bucket	2050 mm (80.7 in)		
	Bucket width	2060 mm (81.1 in)		
	Overall height (Top of exhaust pipe) (Shovel link)	2970 mm (116.9 in) 2210 mm (87.0 in)		
	Shoe width	400 mm (15.7 in)		
	Track gauge	1600 mm (63.0 in)		
	Length of track on ground	2200 mm (86.6 in)		
	Ground pressure	0.76 kg/cm ² (10.81 PSI)		
	Ground contact area.	17600 mm ² (2730 sq. in)		
	Ground clearance	350 mm (13.8 in)		
	Height of drawbar above ground	655 mm (25.8 in)		
PERFORMANCE	Travelling speed	Forward Low 1st	0 - 3.3 km/h (0 - 2.1 MPH)	
		2nd	0 - 6.1 km/h (0 - 3.8 MPH)	
		Forward High 1st	0 - 4.8 km/h (0 - 3.0 MPH)	
		2nd	0 - 8.8 km/h (0 - 5.5 MPH)	
	Reverse Low 1st	0 - 4.2 km/h (0 - 2.6 MPH)		
	2nd	0 - 4.8 km/h (0 - 4.8 MPH)		
	Reverse High 1st	0 - 6.0 km/h (0 - 3.7 MPH)		
	2nd	0 - 11.0 km/h (0 - 6.8 MPH)		
Max. rated drawbar pull		16100 kg (35,490 lb)		
Turning radius		2.7 m (8.9 ft)		
Grade ability		30°		
ENGINE	Model		KOMATSU S4D120-11	
	Type		Water cooled, 4 cycle, vertical pre-combustion chamber type, turbocharged diesel with air compressor	
	No. of cylinders - bore x stroke		4 - 120 mm x 160 mm (4.72 in x 6.30 in)	
	Piston displacement		7240 cc (442 cu. in)	
	Rated RPM		1900	
	Flywheel horsepower		125 HP	
	Max. torque		55.5 kg.m (401 ft.lb)/1200 RPM	
	Fuel consumption ratio		180 g (0.40 lb)/HP.h	

SPECIFICATIONS

MACHINE MODEL		D55S-3 DOZER SHOVEL (TORQFLOW)	
ENGINE	Fuel specification		Diesel gas oil (ASTM D975-60T No. 2D) Cetan No. over 45
	Governor		Mechanical, all speed control
	Lubri- cation system	Lubrication method	Gear pump, forced lubrication
		Filter	Full-flow type
		Oil cooler	Water cooled
	Cooling system		Forced circulation by centrifugal water pump
	Air cleaner		Dry, centrifugal type
	Elec. sys- tem	Generator	24V, 0.3 KW
		Battery	24V (12V x 2) - 150 Ah
	Starting method		By electric starting motor 24V, 7.4 KW
TRANSMITTING SYSTEM	Torque conver- ter	Type	TCS36-1A 4-element, single-stage, 3-phase
		Oil specification	Engine oil (SAE No. 10W)
		Cooling method	Water cooled
	Torqflow transmission	Type	Hydraulically actuated, planetary-gear multi-disc type
		Shift speeds	2 speeds forward, 2 speeds reverse
		Shift lever pattern	
		Lubrication	Pressure feed type
	Range trans- mission	Range transmission type	Spur-gear sliding shift type, high-low shift
		Type	Spiral bevel type, single reduction
		Lubrication	Splash type
	Steering clutch		Wet, multiple disc, foot operated, full hydraulic actuated
	Final drive gear	Type	Spur gear, double reduction
		Lubrication	Splash type

SPECIFICATIONS


MACHINE MODEL		D55S-3 DOZER SHOVEL (TORQFLOW)	
UNDERCARRIAGE	Suspension		Semi-rigid equalizer bar type
	No. of carrier rollers		2, each side
	No. of track rollers		5, each side
	Shoe	Type	Assembled, semi-double grouser
		Grouser height	48 mm (1.9 in)
		No. of shoes	36, each side
		Width	400 mm (15.7 in)
Pitch		190 mm (7.5 in)	
BUCKET ATTACHMENT	Max. loading capacity		2800 kg (6,170 lb)
	Bucket capacity		1.4 m ³ (1.8 cu. yd)
	Max. lift		3420 mm (134.6 in)
	Max. dumping height		2665 mm (104.9 in)
	Max. digging depth		275 mm (10.8 in)
	Reach		1020 mm (40.2 in)
	Max. tilt back angle		44°
HYDRAULIC SYSTEM	Max. oil pressure		140 kg/cm ² (2,000 PSI)
	Hyd. cyl.	No. of lift cylinder-bore	2 - 140 mm (5.51 in)
		No. of dump cylinder-bore	2 - 130 mm (5.12 in)
	Hydraulic oil pump		Gear pump
	Control valve	Location	Within hydraulic oil tank
		Type	Double spool type
		Operating control position	Lift valve: RAISE, HOLD, LOWER, FLOAT Dump valve: DUMP, HOLD, TILT
	Hydraulic tank	Type	Equipped with built-in control valve
		Capacity	92 liters (24.3 U.S. Gal)
		Location	Right side of operator's seat
		Oil specification	Engine oil (SAE 10W)
Filter		Full-flow type	
DRAWBAR	Location		Rear-end center
	Height of drawbar above ground		655 mm (25.8 in)
	Type		Pin fixed type

SPECIFICATIONS

MACHINE MODEL		D55S-3 DOZER SHOVEL (TORQFLOW)
CAPACITIES	Cooling water	53 liters (14 U.S.Gal)
	Fuel tank	240 liters (63 U.S.Gal)
	Engine	18 liters (4.8 U.S.Gal)
	Torque converter Transmission	38 liters (10 U.S.Gal)
	Bevel gear drive Steering case	65 liters (17 U.S.Gal)
	Final drive case (each)	12 liters (3.2 U.S.Gal)
	Hydraulic oil	92 liters (24.3 U.S.Gal)

Specifications are subject to change without notice.

SPECIFICATIONS

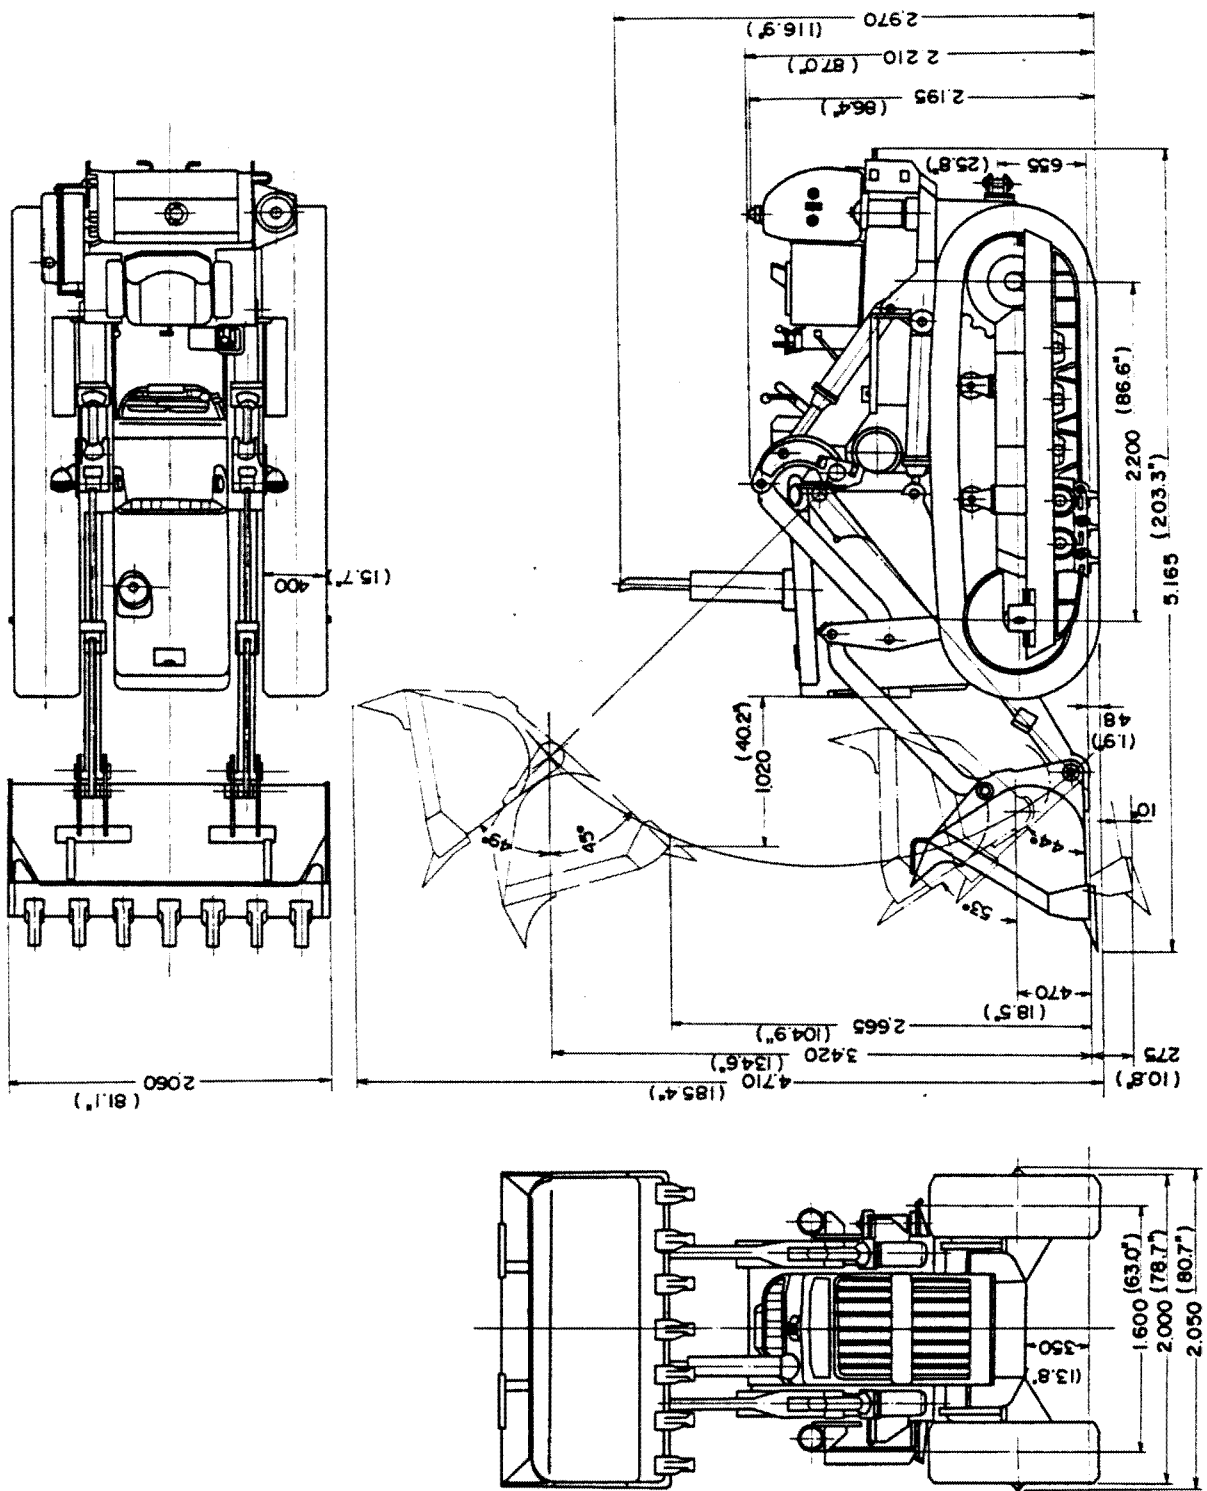

D55S-3 DOZER SHOVEL